




# Dust Collecting Cover

*Prevents dispersion of dust or debris for overhead drilling!!*

Dust collecting cover set  
(plastic cover + holder adaptor)  
Part No. SLSJCH170ST



Holder adaptor  
Part No. SLSJCH

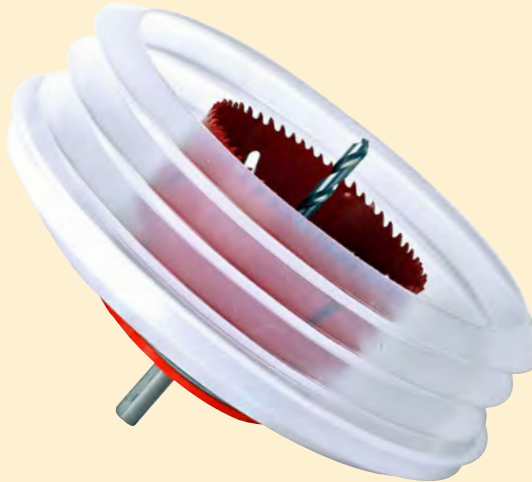

Promotes a clean work environment !



A cutter and arbor are not included.

## Applications

- ◆ Overhead drilling for installation of downlights or recessed lights.
- ◆ Prevents dust or debris when drilling with a cutter of S-LOCK.

## Features

- ◆ Minimal dispersion of dust or debris. Effective for overhead drilling.
- ◆ Usable with all the cutters of S-LOCK series up to 150mm in diameter. ( Part No. SLSJC170 )

## Precaution

When the plastic cover is getting hot by continuous drilling, stop drilling and cool it down.

### Dust collecting cover set 170



Arbor  
( not included )



Holder adaptor



Plastic cover



Cutter  
( not included )

Dust collecting cover must be used with S-LOCK cutter and arbor.  
\*Dust collecting cover can not be used alone.

Description	Part No.	Specification
Dust collecting cover set 145 ( Plastic cover + holder adaptor ) for S-LOCK series	SLSJCH145ST	Usable for a cutter of S-LOCK up to 125mm in diameter ( inner diameter of plastic cover is 145mm )
Dust collecting cover set 170 ( Plastic cover + holder adaptor ) for S-LOCK series	SLSJCH170ST	Usable for a cutter of S-LOCK up to 150mm in diameter ( inner diameter of plastic cover is 170mm )
Holder adaptor	SLSJCH	Use with S-LOCK arbors
Plastic cover 145	SLSJC145	Usable for a cutter of S-LOCK up to 125mm in diameter
Plastic cover 170	SLSJC170	Usable for a cutter of S-LOCK up to 150mm in diameter



**MIYANAGA CO., LTD**

ISO 9001/14001 Certified <http://www.miyanaga.co.jp>



Registered Office and Factory

2393 Fukui, Miki, Hyogo 673-0433, Japan Tel: +81-794-82-3648, Fax: +81-794-82-8462



Representative Office - Europe

Zettachring 12, 70567 Stuttgart, Germany Tel: +49-711-7280661, Fax: +49-711-7157077



MIYANAGA America Corp.

1010 W. Republic Dr. Unit 1, Addison, Illinois 60101, USA Tel: +1-630-359-5795, Fax: +1-630-359-5806

EN047MI18B